


# POINT-OF-USE MEETS POINT OF DIFFERENTIATION

Show up the competition as you up-sell your customers! Now dealers and distributors can match a high style RO faucet with today's high-end kitchens. Made of high quality lead-free brass, our new designer faucet is a real standout – and a great opportunity for you to set yourself apart!

- Combines quality and style with up-sell appeal
- Retrofits most brands
- Smooth operating ceramic disk element
- Lever style handle
- Standard finish is highly polished chrome; other designer finishes available (see back)
- High reach neck design of 12" (305 mm); optional shorter neck also available
- Neck swivels easily, 360°
- Unique protective spout tip prevents after drip
- Modular air gap (patent pending)
- Base diameter is 2-1/4" (57 mm)
- Preinstalled tubing for quick connections
- Mounting hardware included
- NSF listed to ANSI NSF Std. 61-1999a
- Two-year warranty

**tomlinson**<sup>®</sup>

*World Class, Worldwide*

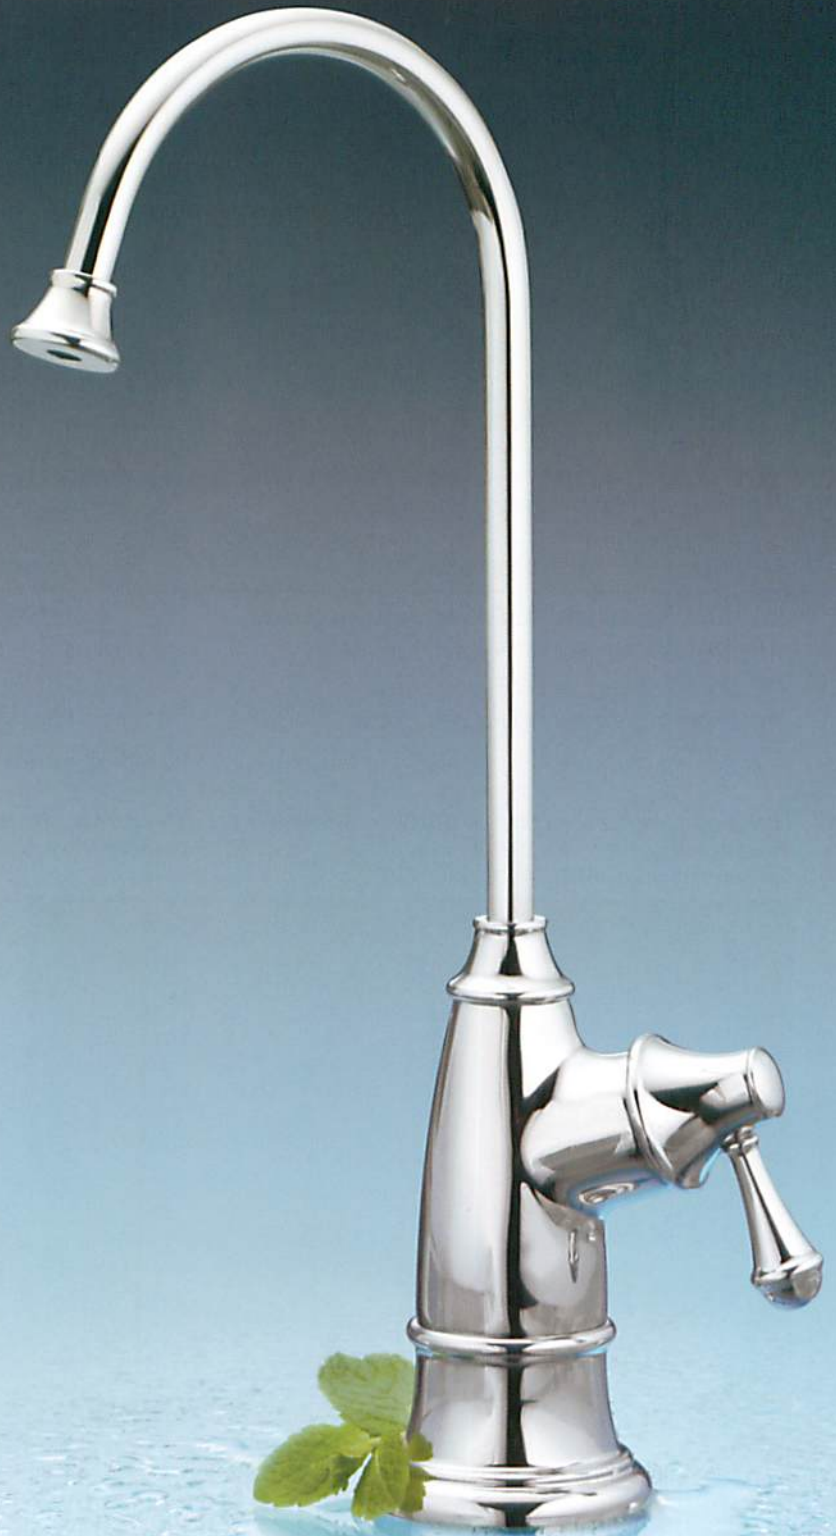

# DESIGNER RO FAUCET



Our RO faucet is available in nine designer finishes to match the décor of today's high-end kitchens.  
(Colors may vary slightly from printed samples shown.)

| Model No | Description                         | Model No     | Description  |
|----------|-------------------------------------|--------------|--|
| 1019299  | Designer RO Faucet, polished chrome | 1019309      | Designer RO Faucet, polished brass                       |
| 1019301  | Designer RO Faucet, satin nickel    | 1019311      | Designer RO Faucet, antique bronze                       |
| 1019303  | Designer RO Faucet, white           | 1019307      | Designer RO Faucet, black                                |
| 1019305  | Designer RO Faucet, biscuit         | 1019444      | Designer RO Faucet, bright nickel                        |
|          |                                     | NEW! 1020518 | Designer RO Faucet, brushed stainless finish (not shown) |

Note: Spout reach is approximately 5" (127 mm). Faucet is 12" (305 mm) high. Preinstalled 1/4" inlet tubing.  
Pressure rating is 125 PSI/8.3 BAR. Flow rate is 1.0 gpm/3.785 lpm at 35 PSI/2.32 BAR.  
Temperature rating is 40°F/4°C to 150°F/66°C.



Preinstalled tubing and easy-to-use mounting hardware make installation fast and simple.

## Tomlinson Industries

13700 Broadway Avenue  
Cleveland, OH 44125-1992  
Phone: 216-587-3400 ext. 279  
Fax: 216-587-6192  
www.tomlinsonind.com

**tomlinson**<sup>®</sup>

World Class, Worldwide